


Idaho Central Vacuum AIRMASTER®

MANUFACTURED BY
MD
CENTRAL VACUUMS

SPECIFICATIONS FOR MODEL
A900rQ
#A1257NH 120 VOLT

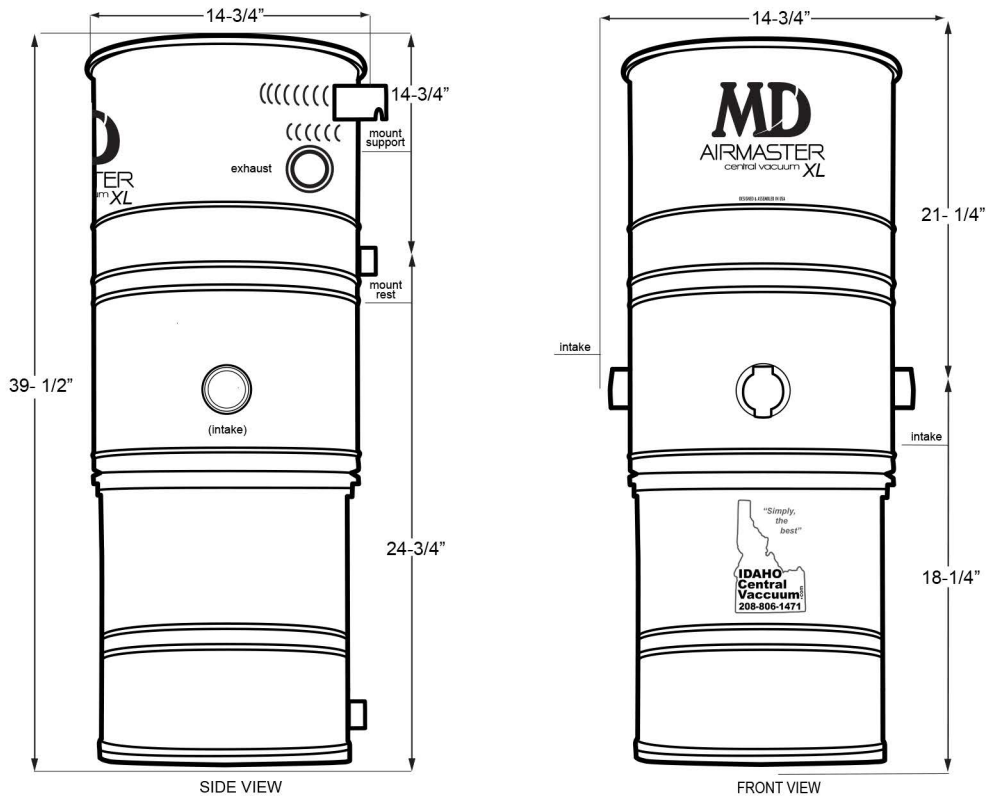

PERFORMANCE

- Sealed Vacuum 139"
- CFM 191
- Air Watts 905
- Volts 120
- Amperage 27.8
- Quietness 64dBA
- Coverage 20,000 ft²

*Recommended home size can be higher or lower when considering these factors: altitude, hours of use, complexity of pipe installation, distance of furthest inlet, noise level, type and size of filtration, and budget.

FEATURES

- Motor:** Dual 3-stage radial bypass motors producing high CFM and Waterlift
- Filtration:** Tru-Seal™ Microfiltration disposable 8-gallon bag, closed top.
- Intakes:** Right & left intakes. Utility Valve.
- Construction:** Durable powder-coated all steel body.
- Overload:** Heat protection resettable minibreaker.
- Warranty:** 12 Years Transferable + Lifetime.
- Dims/Weight:** 14- 3/4" Diameter, 39- 1/2" Tall, 45 lbs.
- Accessories:** All MD accessories and kits are compatible and are sold separately.
- Includes:** Muffler and Venting Pipe.

INSTALLATION

- Electrical:**
 - 120V 50/60HZ, 30 amp circuit. Separate circuit recommended.
 - 6' Cord with typical 120v plug.
 - Fits NEMA 5-30R receptacle.
- Mounting:**
 - Two-stud 17" wide bracket. Easy to hang and remove. Left/right variable positioning. Mount 6" off ground. Leave 24" above unit.
- Venting:**
 - Exterior venting not necessary.
 - 30ft maximum line if venting.

PROJECT	LOCATION
DEALER	DATE / PRICE



Designed & Assembled in USA

www.idahocentralvacuum.com/airmasterXL2
sales@idahocentralvacuum.com

Idaho Central Vacuum
Central Systems
208-806-1471