


Idaho Central Vacuum **FLO-MASTER**[®]

MANUFACTURED BY
MD
CENTRAL VACUUMS


SPECIFICATIONS FOR MODEL

CV300

#F1156AF 120 VOLT

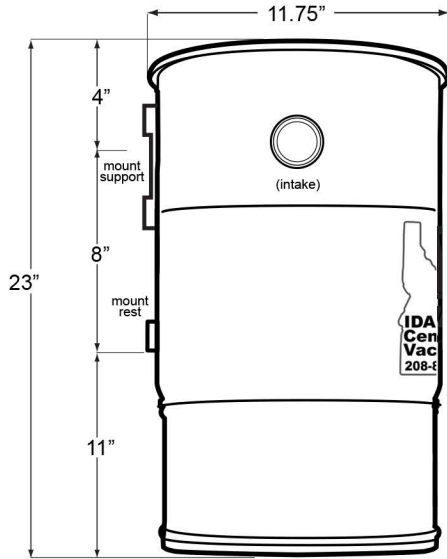

SIDE VIEW

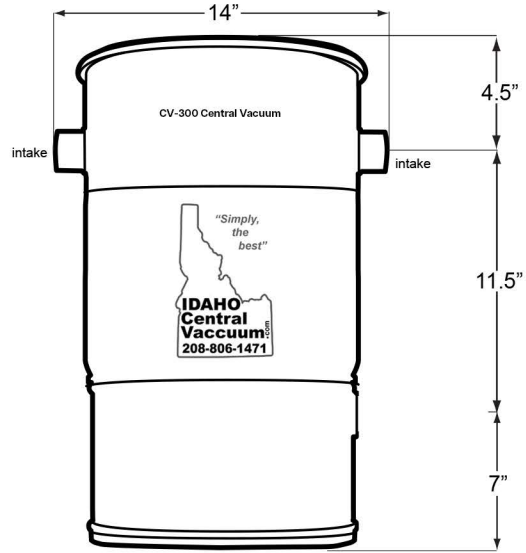

FRONT VIEW

PERFORMANCE

Sealed Vacuum 143.1"
CFM 130.2
Air Watts 650
Volts 120
Amperage 15
Quietness 64dBA
Coverage 3,000 ft²

*Recommended home size can be higher or lower when considering these factors: altitude, hours of use, complexity of pipe installation, distance of furthest inlet, noise level, type and size of filtration, and budget.

FEATURES

- Motor:** Single 2-stage thru-flow motor producing high CFM & waterlift.
- Filtration:** Disposable closed-top 5-gallon bag.
- Intakes:** Right & left intakes.
Air relief valve.
- Construction:** Durable powder-coated all steel body.
- Overload:** Heat protection resettable minibreaker.
- Warranty:** 10 Year Transferable + Lifetime.
- Dims/Weight:** 11.75" Diameter, 23" Tall, 18 lbs.
- Accessories:** All MD accessories and kits are compatible and are sold separately.
- Optional:** Muffler.
- Required:** Included air-relief valve must be installed in the back-side opening.

*Although this unit includes microfiltration, it does not employ the larger Tru-Seal bag. It also does not include any utility valve for direct vacuum hose connection

INSTALLATION

- Electrical:**
120V - 50/60HZ, 15 amp circuit.
Separate circuit recommended.
6' Cord with standard plug fits NEMA 5-20R receptacle.
- Mounting:**
Heavy duty bracket. Easy to hang and remove. Mount 6" off ground. Leave 20" above unit.
- Venting:**
Exterior venting not necessary.
30ft maximum line if venting.

PROJECT	LOCATION
DEALER	DATE / PRICE



Designed & Assembled in USA

www.idahocentralvacuum.com/cv-300
sales@idahocentralvacuum.com

Idaho Central Vacuum
Central Systems
208-806-1471